


RFvision-Broadview

Spectrum Monitoring, Narrowband Channelization & Signal Recognition

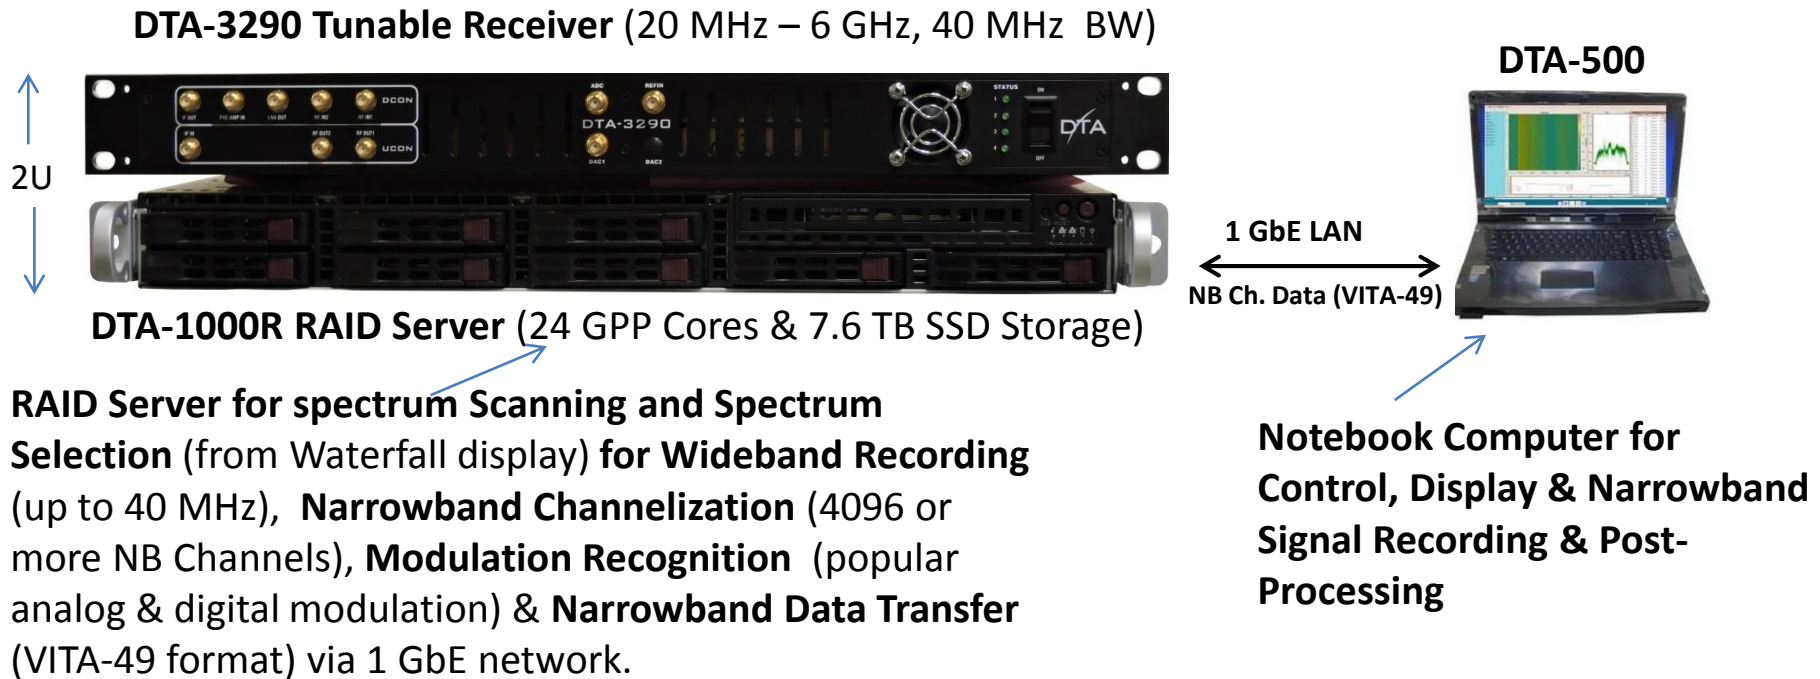

- Open Architecture System
- Frequency Coverage from 20 MHz - 6 GHz (optionally from 1 MHz – 18 GHz)
- High performance receiver with DDC selectable Operating BW from 2.5 MHz – 40 MHz
- Wideband long duration recording
- Real-time Narrowband channelization to 4096 or more channels
- Narrowband processing for modulation recognition (popular analog & digital modulations)
- Optional Second Receiver to Support “Scan & Stare’ Mode of Operation
- Optional independently tunable wideband RF output.