


RFvision1-mini Portable Wideband RF Recording & Broadcasting System



RFvision1-mini

- 20 MHz – 6 GHz frequency coverage (1 MHz – 6 GHz, optional)
- 8 dB noise figure, 93 dB gain control, >30dBm OIP3 & 80 dB SFDR
- 16 Bit data converters & programmable DDC for BW selection from 2.5 MHz to 40 MHz
- Over 7 hours of record/playback of baseband I & Q data for full 40 MHz BW
- Independently tuned RF output of pre-recorded or computer generated data (for ARB)
- Wireless tablet for convenient control & operation
- SigInspector™ -1(Standard) GUI software for manual or automated spectrum scanning with waterfall display for spectrum selection for recording, data file transfer & RF playback
- GPS synchronization

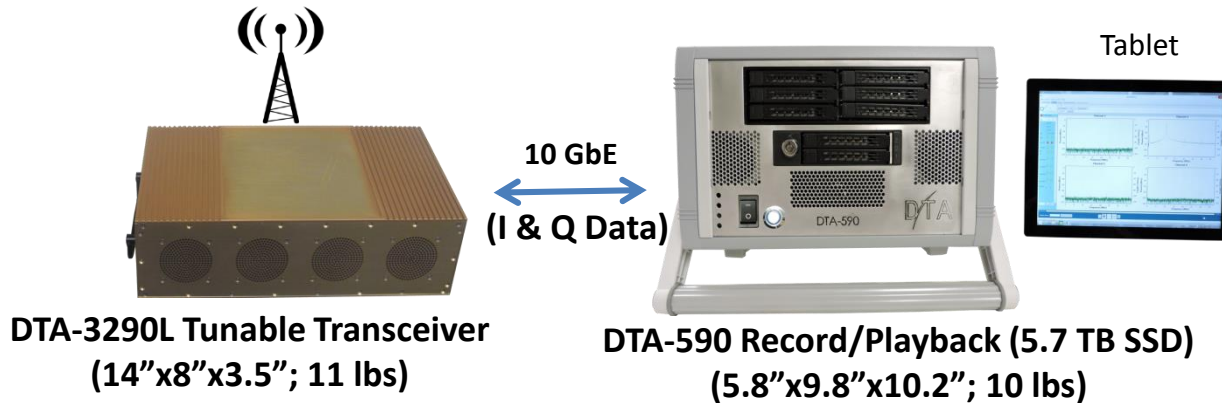

Portability Without Compromise

Download "[Spectrum On-The-Go](http://www.d-ta.com)" presentation directly from home page, www.d-ta.com